

Fig 3A

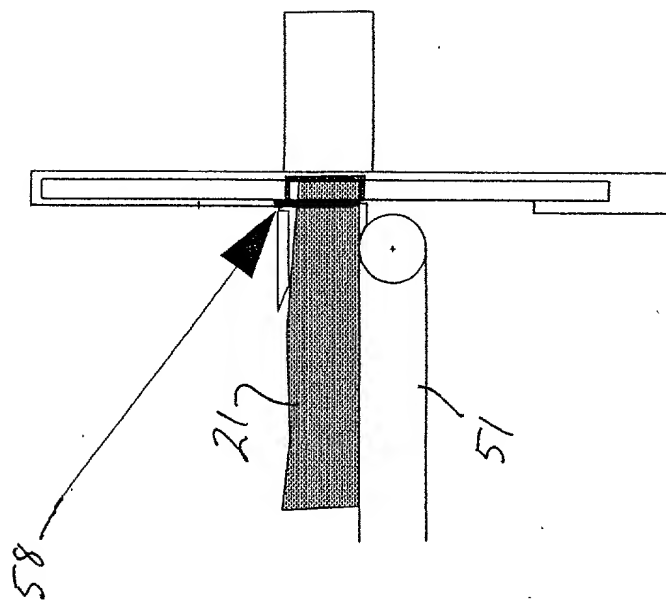


Fig 3B

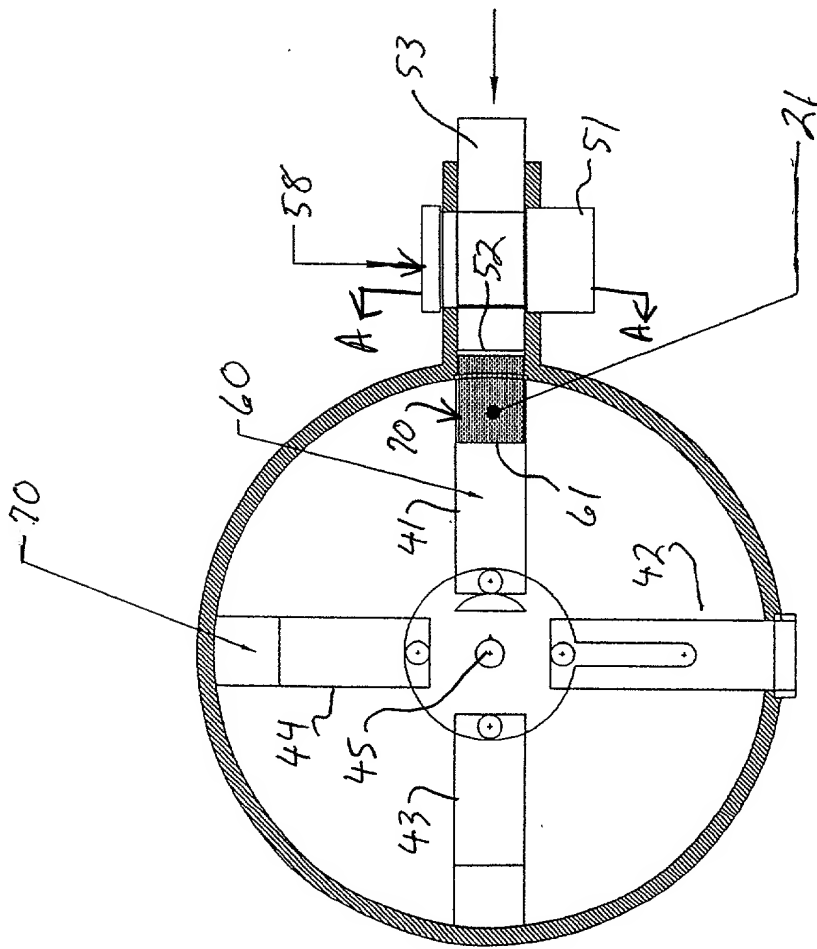


Fig 4A

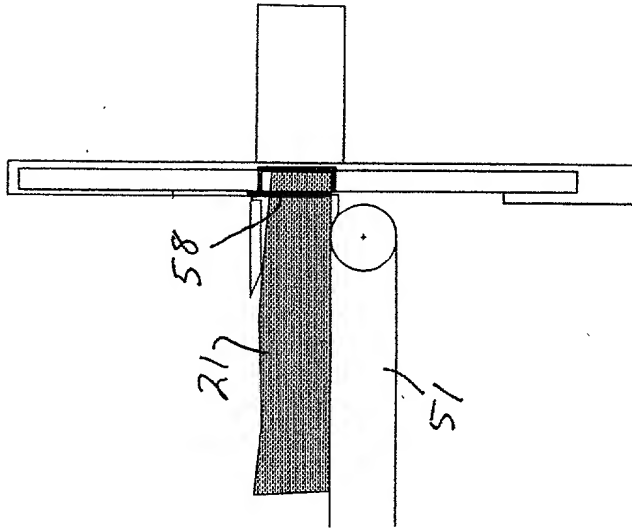


Fig 4B

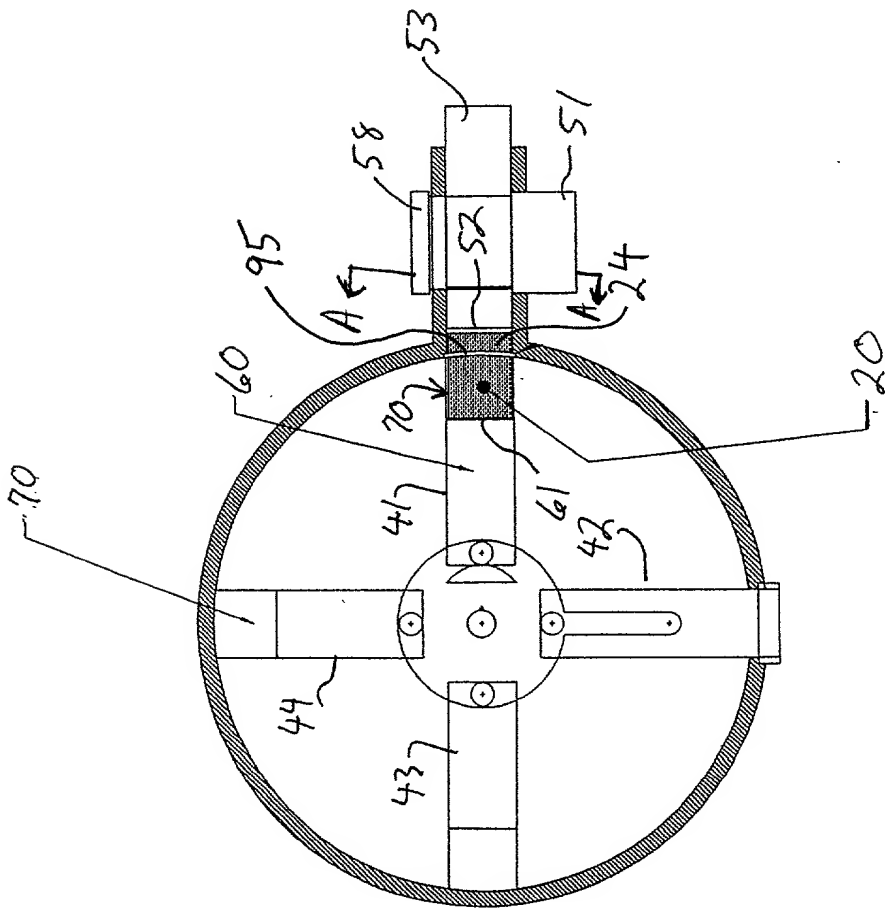


Fig 5A

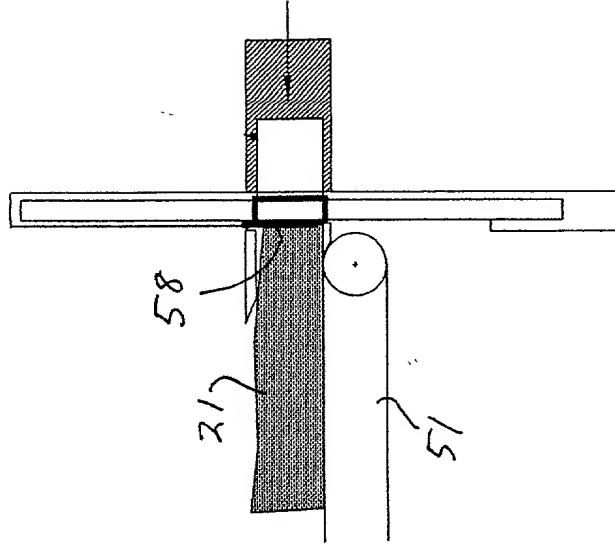


Fig 5B

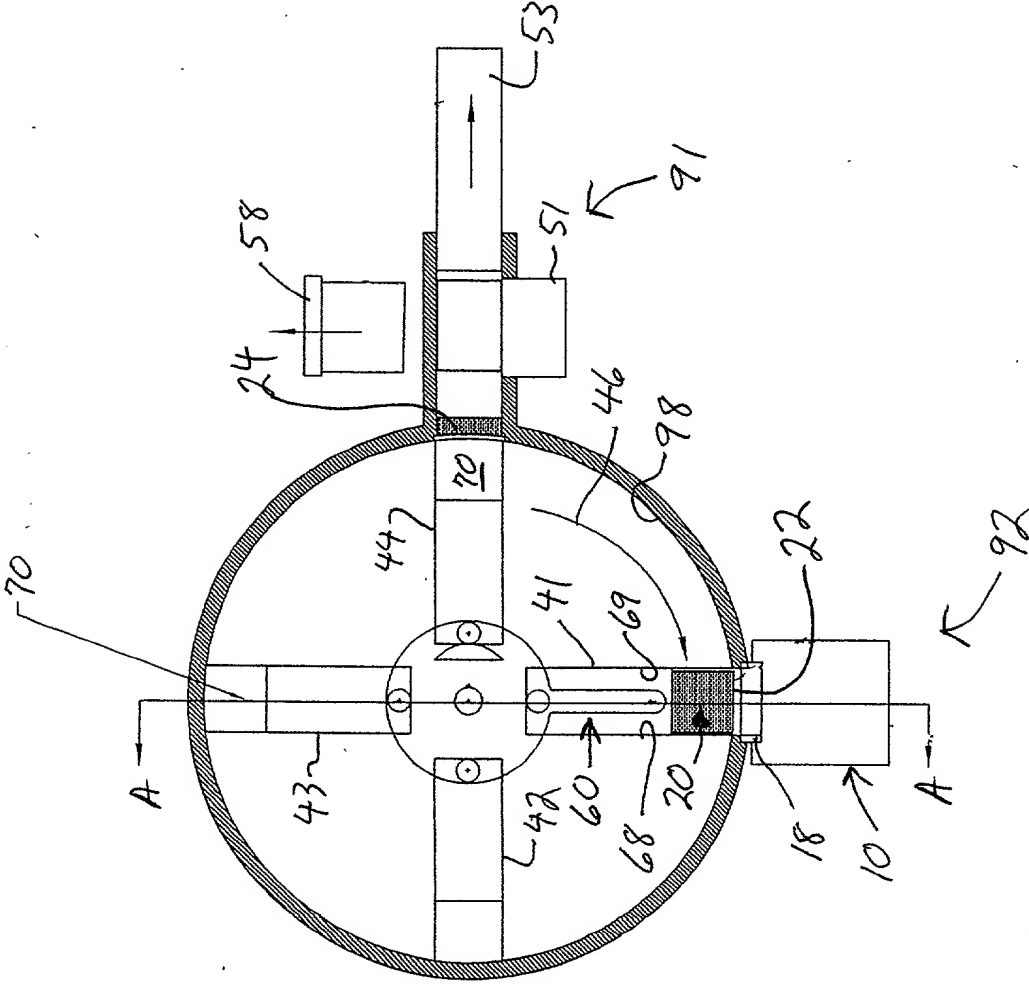


Fig 6A

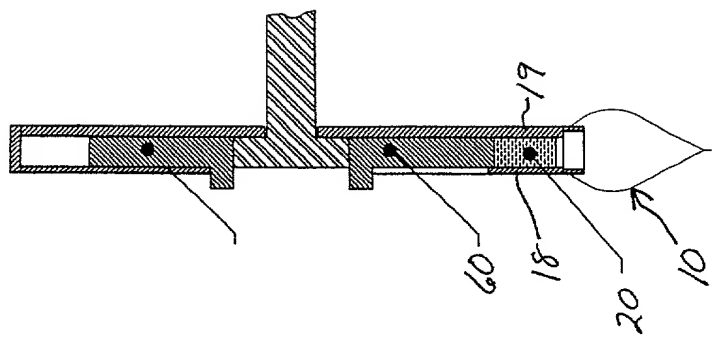
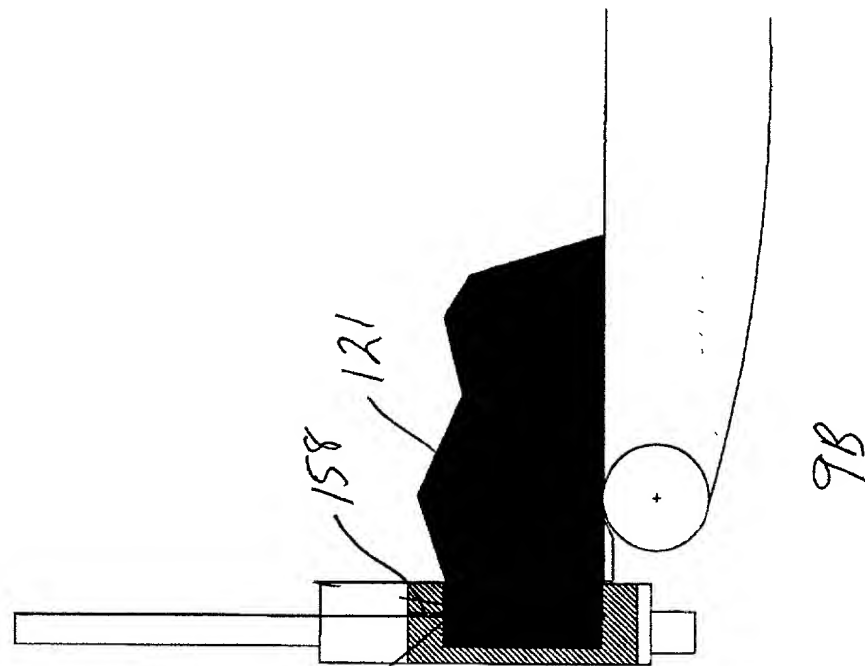
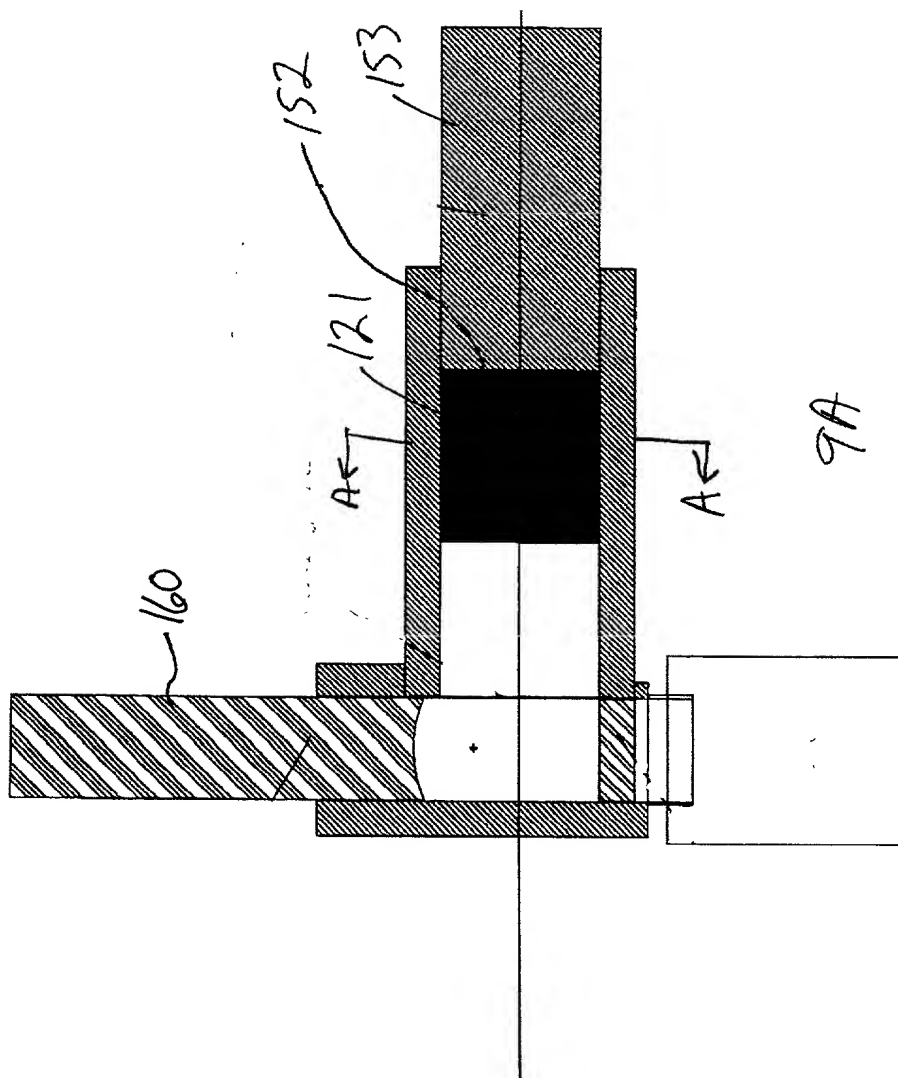


Fig 6B










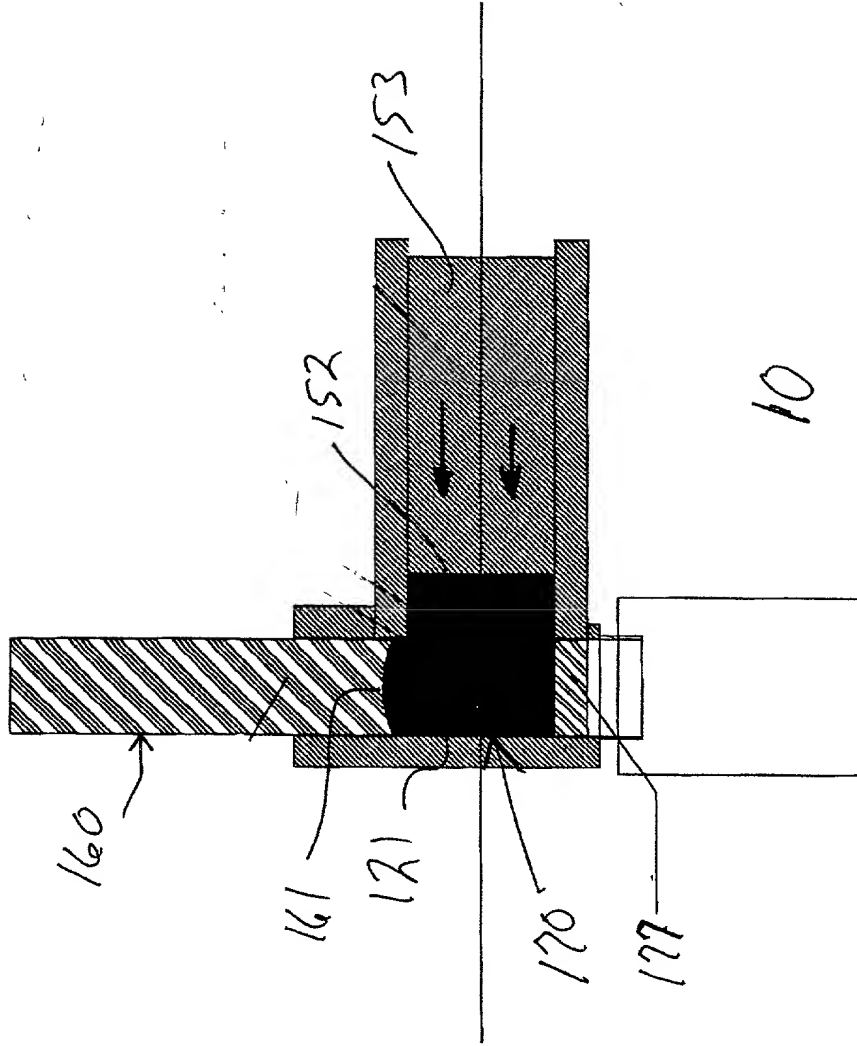


FIG. 11 is a cross-sectional view of the device of FIG. 10, taken along line 11-11 of FIG. 10, showing the device in a second position. The device is shown in a second position, with the first member 110 and the second member 120 in a second position, relative to the third member 130. The device is shown in a second position, with the first member 110 and the second member 120 in a second position, relative to the third member 130.

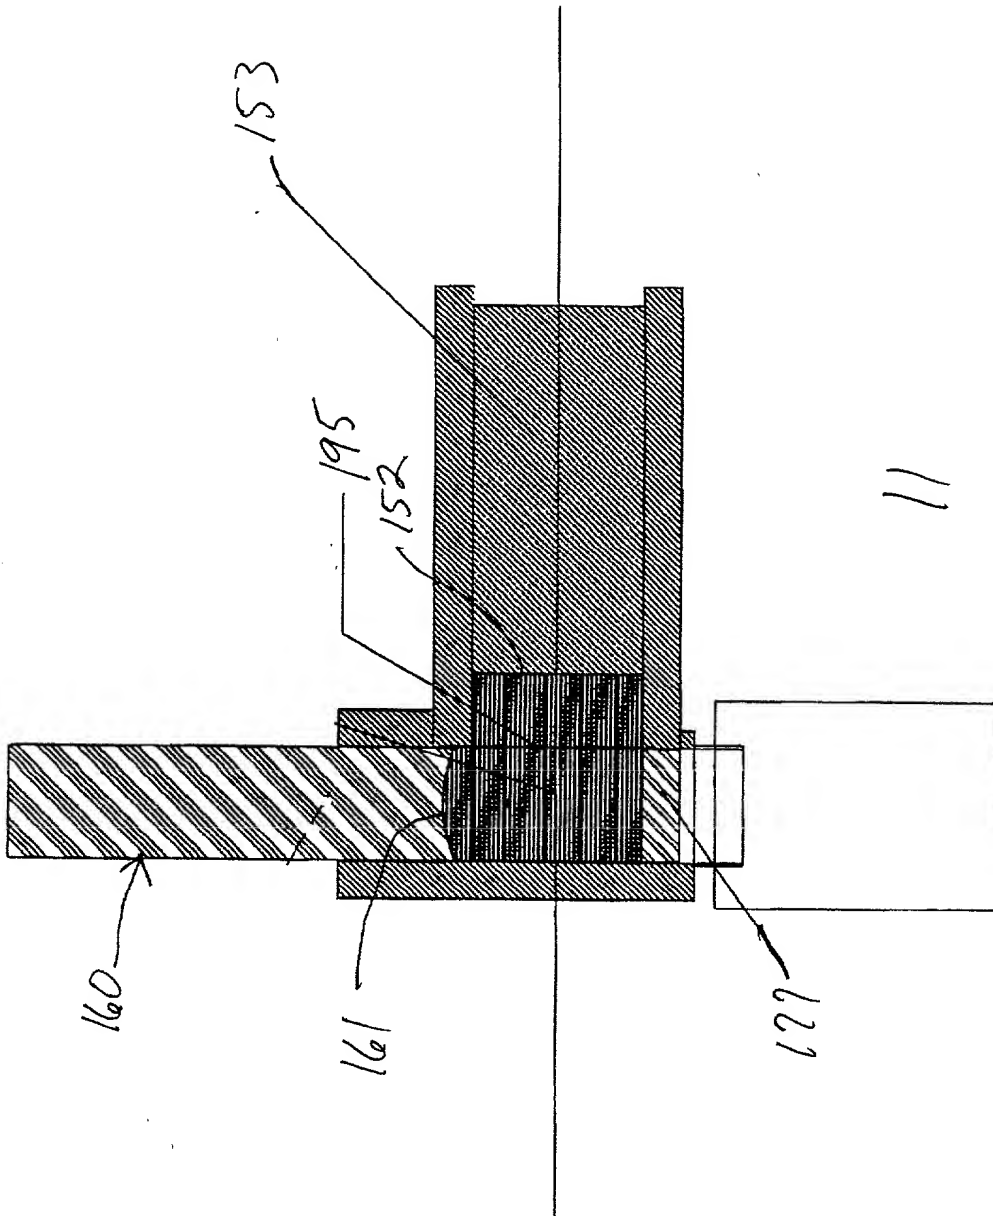

11

FIG. 12 is a cross-sectional view of the device of FIG. 11, showing the device in a second state of operation. The device is shown in a cross-sectional view, with the device 100 and the device 110. The device 100 is shown in a cross-sectional view, with the device 110. The device 100 is shown in a cross-sectional view, with the device 110.

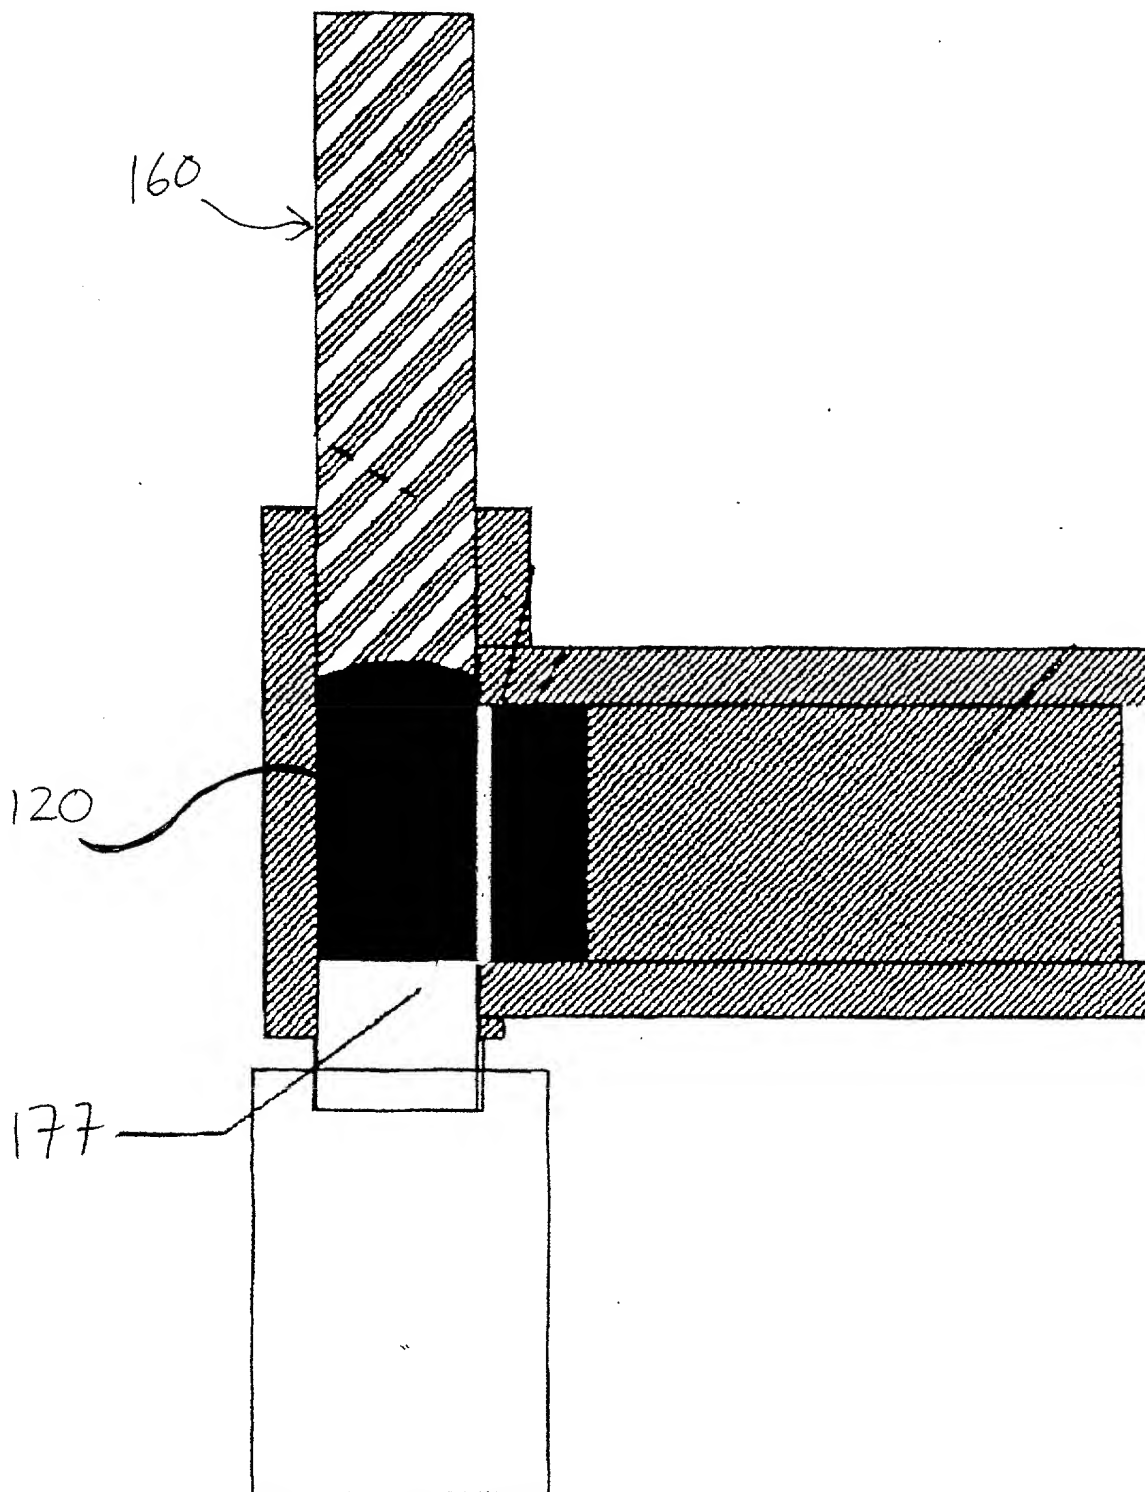


FIG 12

FIG. 13 is a cross-sectional view of the device of FIG. 12, showing the device in a second state of operation. In this state, the device is configured to receive a signal from the antenna 110 and transmit the signal to the antenna 120. The device is configured to receive the signal from the antenna 110 and transmit the signal to the antenna 120. The device is configured to receive the signal from the antenna 110 and transmit the signal to the antenna 120.

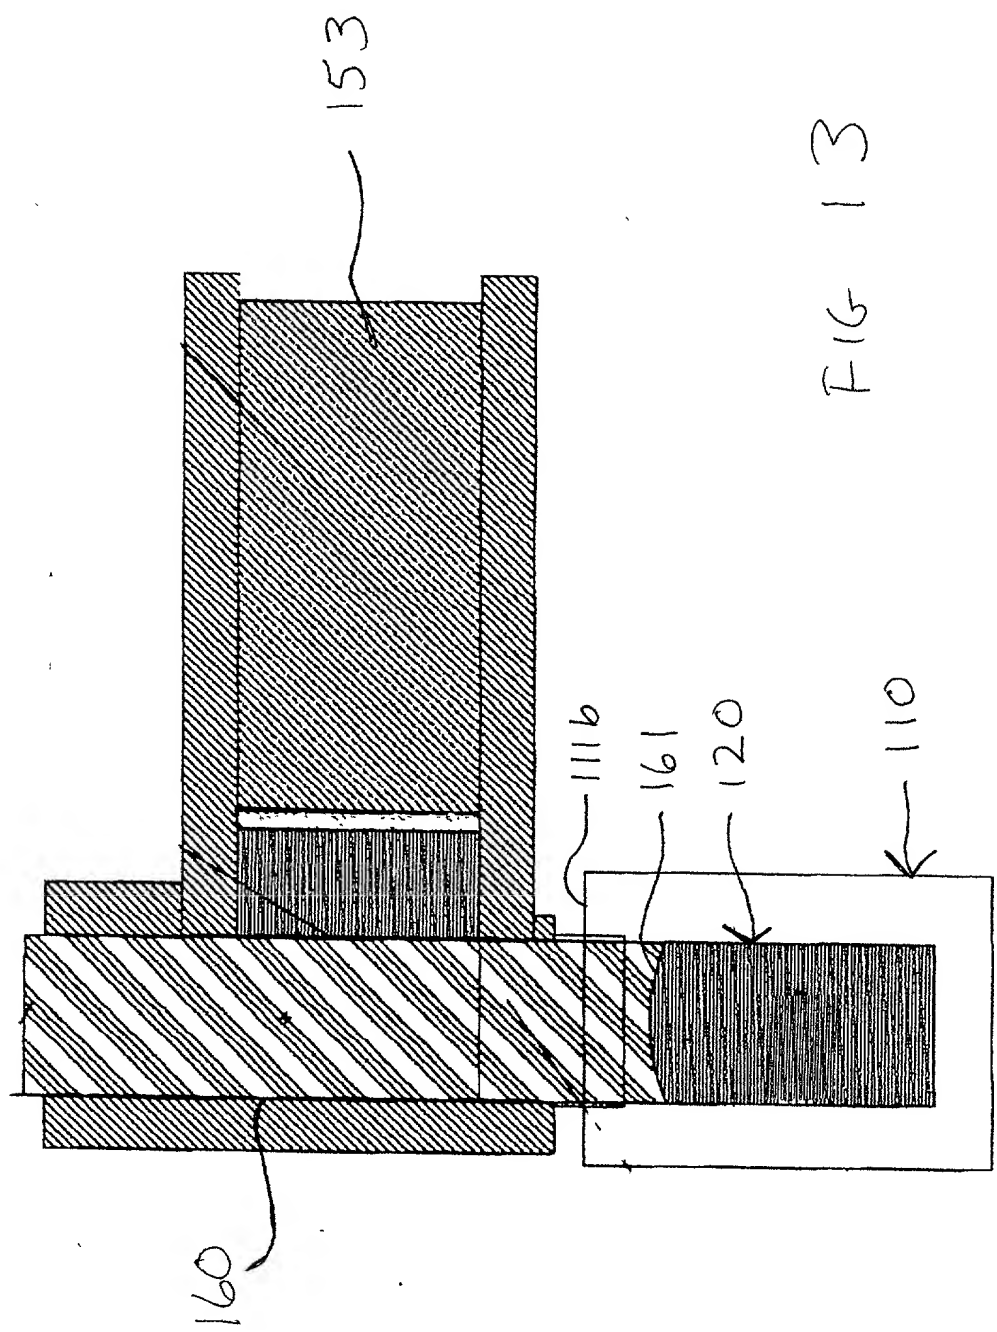
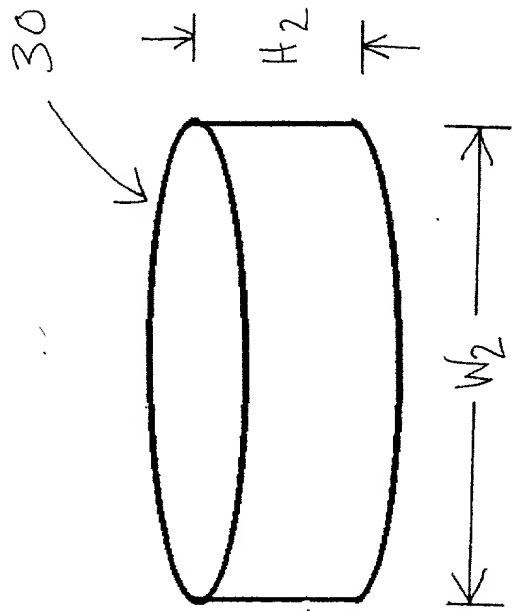
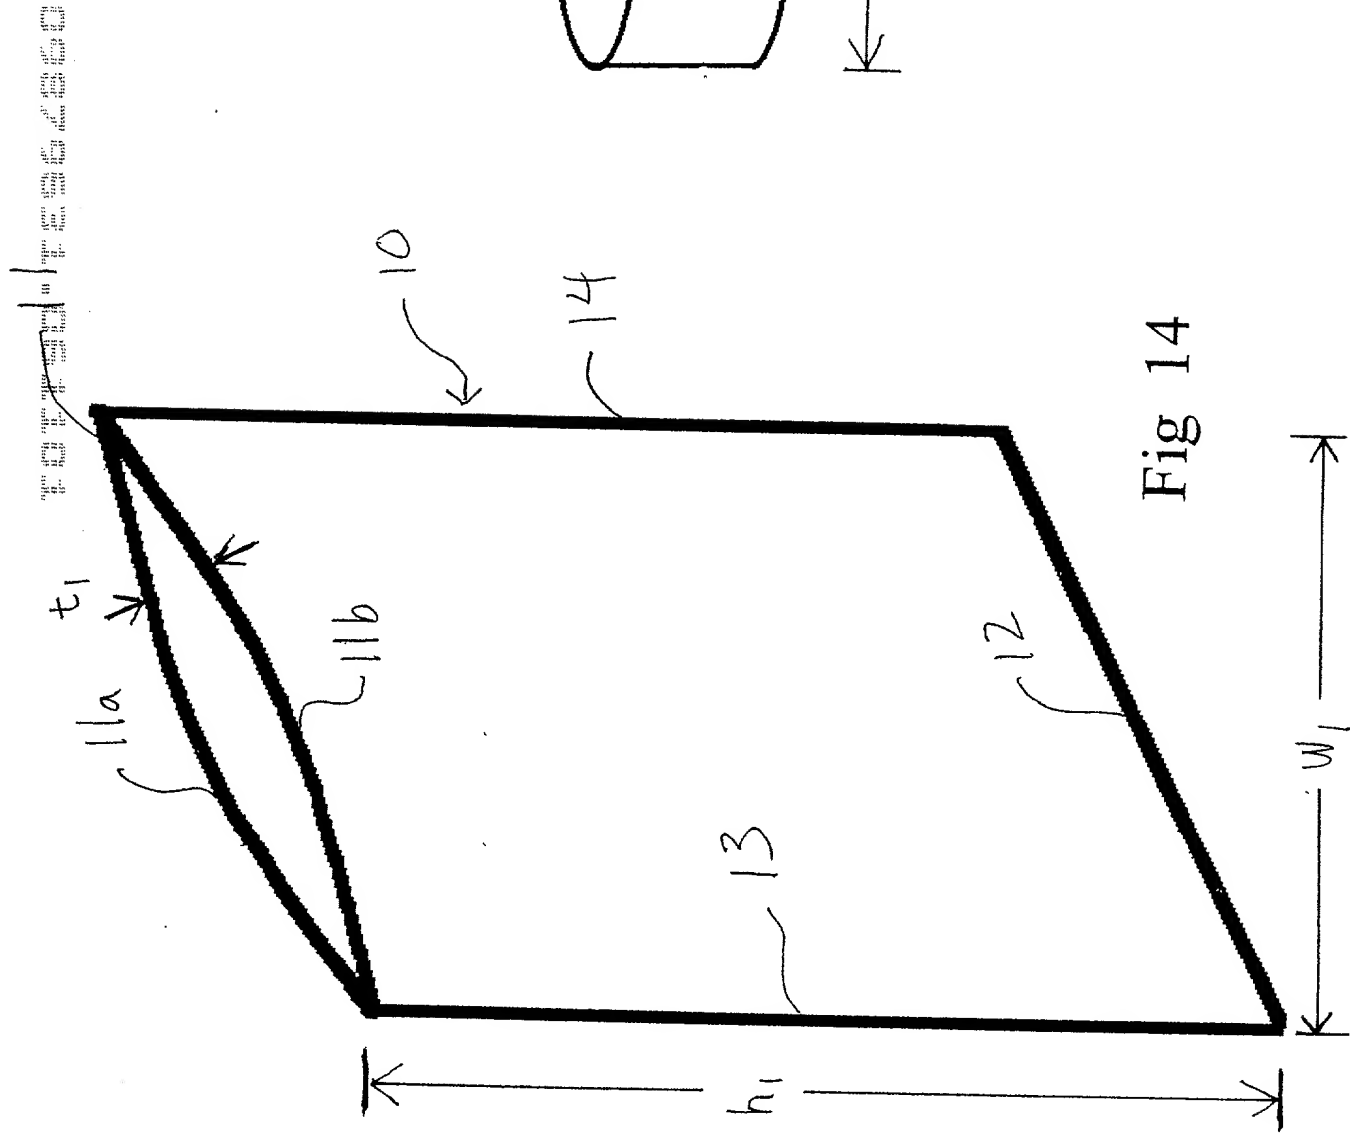


FIG 13



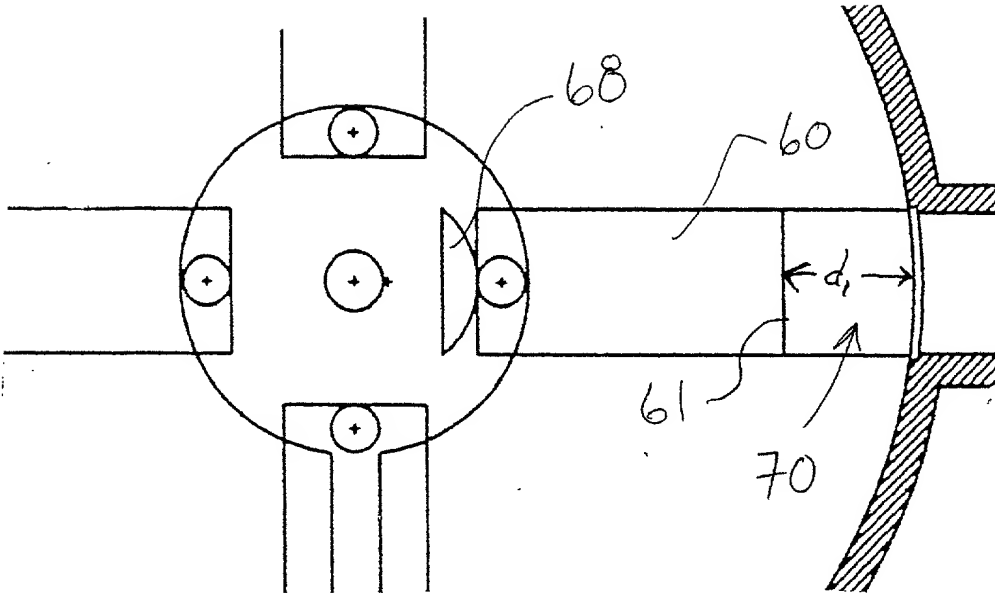


Fig 16A

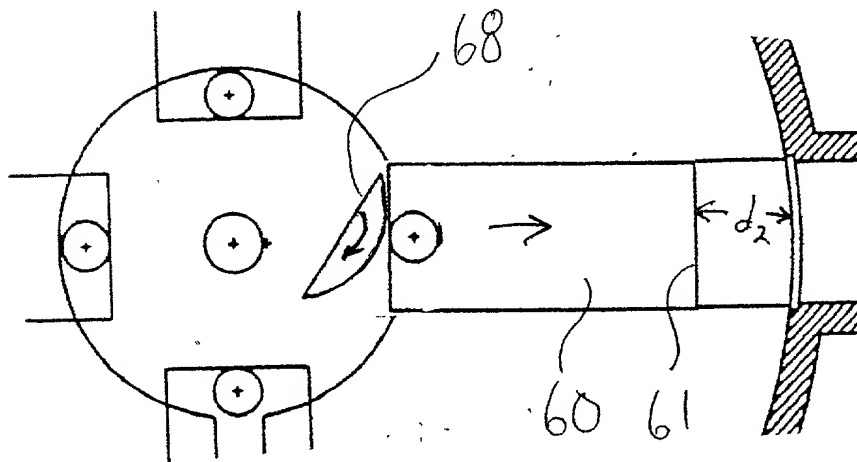


Fig 16B

